


SPECIFICATIONS

| Size | Metric | British |
|--|-------------|------------------|
| Max. Working Height 🛕 | 14.00m | 45ft 11in |
| Max. Platform Height (B) | 12.00m | 39ft 4in |
| Overall Length(Stowed) © | 1.70m | 5ft 7in |
| Overall Width(Stowed) | 0.82m | 2ft 8in |
| Overall Height(Stowed) | 2.37m | 7ft 9in |
| Outrigger Footprint(Length ()×Width () | 2.31m/2.39m | 7ft 7in/7ft 10in |
| Platform Size(Length (*) × Width (*) | 1.40m×0.65m | 4ft 7in×2ft 2in |
| Ground Clearance | 0.055m | 2in |
| BackSize | 0.18m | 7in |
| FrontSize | 0.18m | 7in |

| Performance | | |
|----------------|----------|----------|
| S.W.L | 200kg | 440lb |
| Max. Occupants | 2 | 2 |
| Up/Down Speed | 75/45sec | 75/45sec |

| Weight | | |
|-------------|--------|--------|
| Weight - AC | 1020kg | 2248lb |
| Weight - DC | 1080kg | 2380lb |

| Power | | |
|--------------------|--------------|--------------|
| Battery | 2×12V/85Ah | 2×12V/85Ah |
| Charger | 12V/15A | 12V/15A |
| Lifting Motor - AC | 220VAC/1.5kW | 220VAC/1.5kW |
| Lifting Motor - DC | 12VDC/2.5kW | 12VDC/2.5kW |

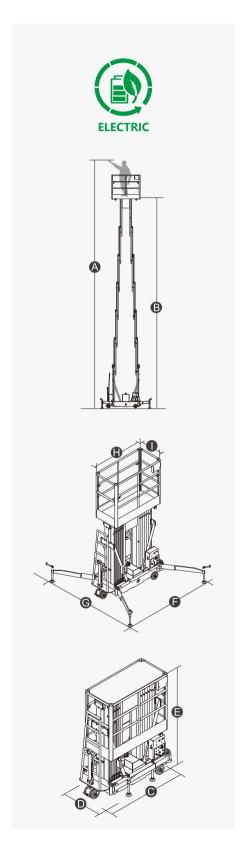



FEATURES

Standard Items

- Self-Locking Gates
- Emergency Descent System
- Tubing Explosion-Proof System
- Motion Alarm
- Charging Indicator(DC type)
- Charging Protection System(DC type)
- Flashing Beacon
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Emergency Stop Button



DINGLI AWP INDIA PRIVATE LIMITED

Address: Sahney Towers, 81, First Floor, Poonamallee High Road, Nerkundram,

Chennai, Tamil Nadu - 600 107 Telephone: +91-98846 48464 E-mail: support@dinglisaarc.com Website: https://dinglisaarc.com











