


SPECIFICATIONS

Metric	British
5.60m	18ft 4in
3.60m	11ft 10in
1.29m	4ft 3in
1.44m	4ft 9in
0.76m	2ft 6in
1.99m	6ft 6in
1.62m	5ft 3in
1.29m×0.70m	4ft 3in×2ft 4in
0.60m	2ft
0.06m/0.015m	2in/1in
1.05m	3ft 5in
0.40m/1.55m	1ft 4in/5ft 1in
φ230×80mm	φ230×80mm
	5.60m 3.60m 1.29m 1.44m 0.76m 1.99m 1.62m 1.29m×0.70m 0.60m 0.06m/0.015m 1.05m 0.40m/1.55m

Performance		
S.W.L	240kg	529lb
S.W.L On Extension	100kg	220lb
Max. Occupants (Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	4.0km/h	2.49mph
Travel Speed(Raised)	0.6km/h	0.37mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	27/20sec	27/20sec

Weight			
Overall Weight	920kg	2028lb	

Power		
Hydraulic Tank	3L	0.8gal
Battery	24V/85Ah	24V/85Ah
Charger	24V/15A	24V/15A
Driving Motor	2×24VDC/0.4kW	2×24VDC/0.4kW
Lifting Motor	24VDC/1.2kW	24VDC/1.2kW

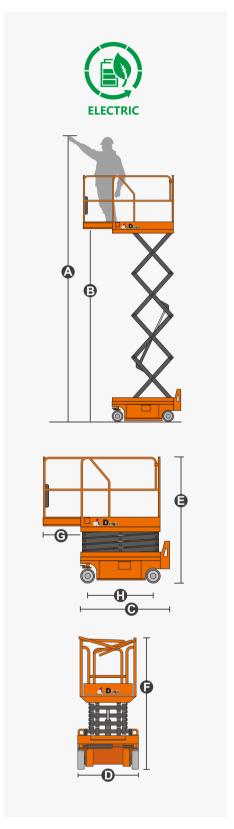



Self-propelled Scissor Lifts



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



DINGLI AWP INDIA PRIVATE LIMITED

Address: Sahney Towers, 81, First Floor, Poonamallee High Road, Nerkundram,

Chennai, Tamil Nadu - 600 107 Telephone: +91-98846 48464 E-mail: support@dinglisaarc.com Website: https://dinglisaarc.com











