


## **SPECIFICATIONS**

| Metric       | British   |
|--------------|---|
| 6.50m        | 21ft 4in  |
| 4.50m        | 14ft 9in  |
| 1.58m        | 5ft 2in   |
| 0.76m        | 2ft 6in   |
| 2.05m        | 6ft 9in   |
| 1.68m        | 5ft 6in   |
| 1.44m×0.74m  | 4ft 9in×2ft 5in   |
| 0.60m        | 2ft   |
| 0.07m/0.016m | 3in/1in   |
| 1.12m        | 3ft 8in   |
| 0m/1.30m     | 0m/4ft 3in  |
| Ф305×100mm   | Ф305×100mm  |
|              | 6.50m 4.50m 1.58m 0.76m 2.05m 1.68m 1.44m×0.74m 0.60m 0.07m/0.016m 1.12m 0m/1.30m |

| Performance                     |             |             |
|---------------------------------|-------------|-------------|
| S.W.L                           | 230kg       | 507lb       |
| S.W.L On Extension              | 113kg       | 249lb       |
| Max. Occupants (Indoor/Outdoor) | 2/1         | 2/1         |
| Gradeability                    | 25%         | 25%         |
| Travel Speed(Stowed)            | 4.5km/h     | 2.80mph     |
| Travel Speed(Raised)            | 0.6km/h     | 0.37mph     |
| Max. Working Slope              | X-1.5°/Y-3° | X-1.5°/Y-3° |
| Up/Down Speed                   | 22/20sec    | 22/20sec    |
|                                 |             |             |

| Weight         |        |        |  |
|----------------|--------|--------|--|
| Overall Weight | 1200kg | 2646lb |  |

| Power          |               |               |
|----------------|---------------|---------------|
| Hydraulic Tank | 3.5L          | 0.9gal        |
| Battery        | 24V/115Ah     | 24V/115Ah     |
| Charger        | 24V/15A       | 24V/15A       |
| Driving Motor  | 2×24VDC/0.5kW | 2×24VDC/0.5kW |
| Lifting Motor  | 24VDC/2.2kW   | 24VDC/2.2kW   |
|                |               |               |

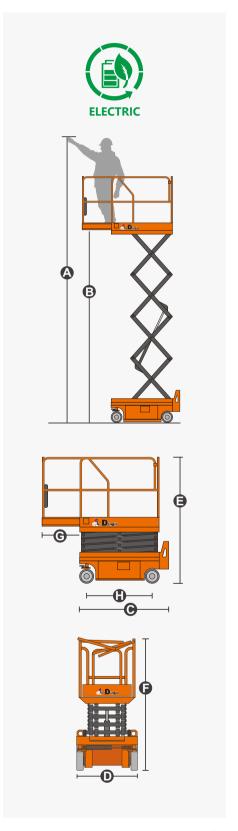



Self-propelled Scissor Lifts



## **FEATURES**

## Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



## **DINGLI AWP INDIA PRIVATE LIMITED**

Address: Sahney Towers, 81, First Floor, Poonamallee High Road, Nerkundram,

Chennai, Tamil Nadu - 600 107 Telephone: +91-98846 48464 E-mail: support@dinglisaarc.com Website: https://dinglisaarc.com











