


SPECIFICATIONS

| Size | Metric | British |
|-------------------------------------|--------------|-----------------|
| Max. Working Height A | 7.60m | 24ft 11in |
| Max. Platform Height B | 5.60m | 18ft 4in |
| Overall Length C | 1.54m | 5ft 1in |
| Overall Width D | 0.81m | 2ft 8in |
| Overall Height(Rails Up) E | 2.08m | 6ft 10in |
| Overall Height(Rails Down) F | 1.72m | 5ft 8in |
| Platform Size(Length×Width) | 1.37m×0.70m | 4ft 6in×2ft 4in |
| Platform Extension Size G | 0.60m | 2ft |
| Ground Clearance(Stowed/Raised) | 0.07m/0.015m | 3in/1in |
| Wheelbase H | 1.15m | 3ft 9in |
| Turning Radius(Inside/Outside) | 0.45m/1.60m | 1ft 6in/5ft 3in |
| Tyres | φ305×100mm | φ305×100mm |

| Performance | | |
|---------------------------------|-------------|-------------|
| S.W.L | 230kg | 507lb |
| S.W.L On Extension | 113kg | 249lb |
| Max. Occupants (Indoor/Outdoor) | 2/0 | 2/0 |
| Gradeability | 25% | 25% |
| Travel Speed(Stowed) | 4.0km/h | 2.49mph |
| Travel Speed(Raised) | 0.6km/h | 0.37mph |
| Max. Working Slope | X-1.5°/Y-3° | X-1.5°/Y-3° |
| Up/Down Speed | 30/23sec | 30/23sec |

| Weight | | |
|----------------|--------|--------|
| Overall Weight | 1300kg | 2866lb |

| Power | | |
|----------------|----------------|----------------|
| Hydraulic Tank | 4L | 1gal |
| Battery | 24V/115Ah | 24V/115Ah |
| Charger | 24V/15A | 24V/15A |
| Driving Motor | 2×24VDC/0.45kW | 2×24VDC/0.45kW |
| Lifting Motor | 24VDC/2.2kW | 24VDC/2.2kW |

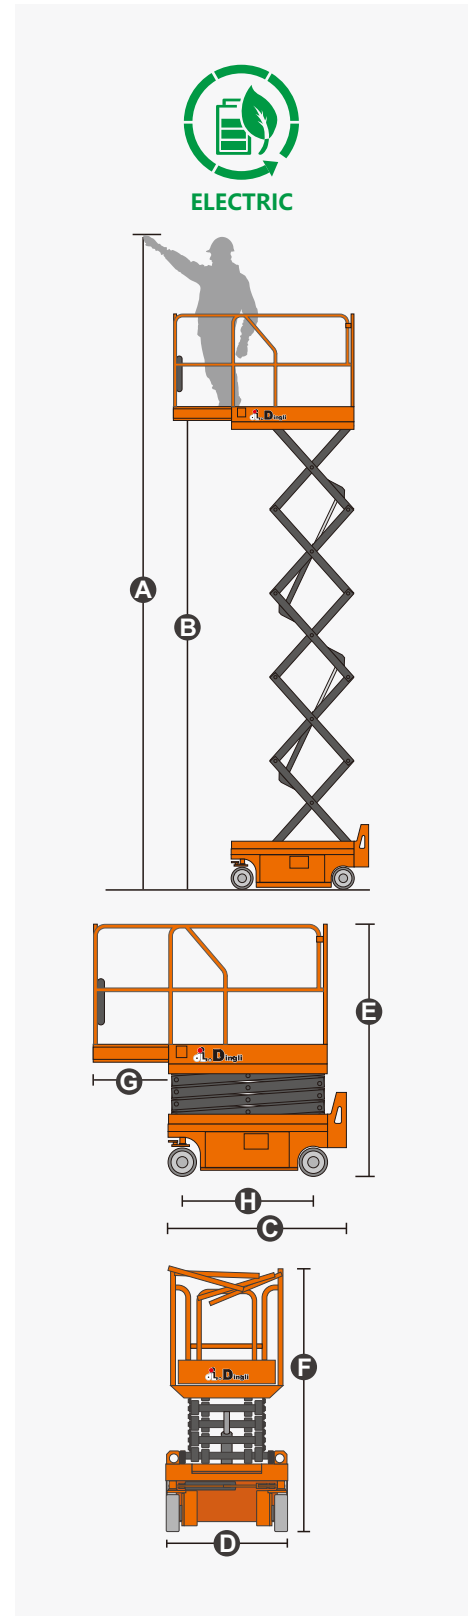

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



DINGLI AWP INDIA PRIVATE LIMITED

Address: Sahney Towers, 81, First Floor, Poonamallee High Road, Nerkundram,
Chennai, Tamil Nadu - 600 107
Telephone: +91-98846 48464
E-mail: support@dinglisaarc.com
Website: <https://dinglisaarc.com>

