


SPECIFICATIONS

| Size | Metric | British |
|--|-------------|-------------------|
| Max. Working Height A | 12.00m | 39ft 4in |
| Max. Platform Height B | 10.00m | 32ft 10in |
| Overall Length(Without Outriggers) | 3.19m | 10ft 6in |
| Overall Length(With Outriggers) © | 3.84m | 12ft 7in |
| Overall Width ① | 1.76m | 5ft 9in |
| Overall Height(Rails Up) | 2.59m | 8ft 6in |
| Overall Height(Rails Down) | 1.82m | 6ft |
| Platform Size(Length×Width) | 2.88m×1.52m | 9ft 5in × 5ft |
| Platform Extension Size G | 1.43m | 4ft 8in |
| Ground Clearance | 0.24m | 9in |
| Wheelbase (| 2.29m | 7ft 6in |
| Turning Radius(Inside/Outside) | 2.15m/4.85m | 7ft 1in/15ft 11in |
| Tyres | 26×12-16.5 | 26×12-16.5 |

| Performance | | |
|---------------------------------|-------------|-------------|
| S.W.L | 454kg | 1000lb |
| S.W.L On Extension | 136kg | 299lb |
| Max. Occupants (Indoor/Outdoor) | 4/2 | 4/2 |
| Gradeability | 40% | 40% |
| Travel Speed(Stowed) | 5.00km/h | 3.10mph |
| Travel Speed(Raised) | 0.45km/h | 0.28mph |
| Max. Working Slope | X-1.5°/Y-3° | X-1.5°/Y-3° |
| Up/Down Speed | 38/46sec | 38/46sec |

| Weight | | | |
|----------------|--------|--------|--|
| Overall Weight | 4300kg | 9479lb | |

| Power | | |
|----------------|----------------|----------------|
| Diesel Engine | 18.2kW/3000rpm | 18.2kW/3000rpm |
| Diesel Tank | 47L | 12.4gal |
| Hydraulic Tank | 71L | 18.7gal |

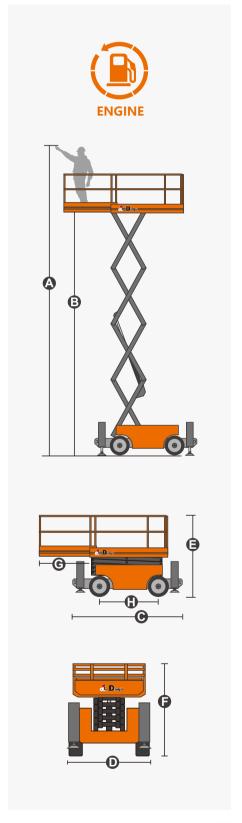



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- · Lanyard Attachment Point
- Standard Transport Forklift Pockets
- Tie-Down And Lifting Points
- · Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height
- Oscillating Axle Chassis



DINGLI AWP INDIA PRIVATE LIMITED

Address: Sahney Towers, 81, First Floor, Poonamallee High Road, Nerkundram,

Chennai, Tamil Nadu - 600 107 Telephone: +91-98846 48464 E-mail: support@dinglisaarc.com Website: https://dinglisaarc.com











