


SPECIFICATIONS

| Size | Metric | British |
|----------------------------------|--------------|-----------------|
| Max. Working Height A | 13.80m | 45ft 3in |
| Max. Platform Height B | 11.80m | 38ft 9in |
| Overall Length © | 2.48m | 8ft 2in |
| Overall Width ① | 1.19m | 3ft 11in |
| Overall Height(Rails Up) | 2.62m | 8ft 7in |
| Overall Height(Rails Down) | 2.09m | 6ft 10in |
| Platform Size(Length×Width) | 2.27m×1.12m | 7ft 5in×3ft 8in |
| Platform Extension Size G | 0.90m | 2ft 11in |
| Ground Clearance(Stowed/Raised) | 0.10m/0.019m | 4in/1in |
| Wheelbase (H | 1.87m | 6ft 2in |
| Turning Radius(Inside/Outside) | 0m/2.20m | 0in/7ft 3in |
| Tyres | φ381×127mm | φ381×127mm |

| Performance | | |
|---------------------------------|-------------|-------------|
| S.W.L | 320kg | 705lb |
| S.W.L On Extension | 113kg | 249lb |
| Max. Occupants (Indoor/Outdoor) | 3/0 | 3/0 |
| Gradeability | 25% | 25% |
| Travel Speed(Stowed) | 3.5km/h | 2.17mph |
| Travel Speed(Raised) | 0.8km/h | 0.50mph |
| Max. Working Slope | X-1.5°/Y-3° | X-1.5°/Y-3° |
| Up/Down Speed | 58/40sec | 58/40sec |

| Weight | | | |
|----------------|--------|--------|--|
| Overall Weight | 2980kg | 6569lb | |

| 20L | 5.3gal |
|-------------|----------------------|
| 24V/240Ah | 24V/240Ah |
| 24V/30A | 24V/30A |
| 15VAC/3.5kW | 15VAC/3.5kW |
| | 24V/240Ah 24V/30A |

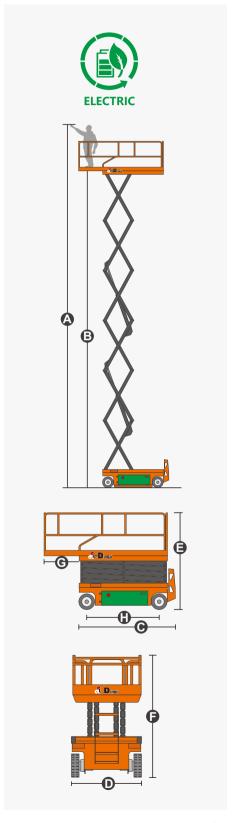





FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- · Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



DINGLI AWP INDIA PRIVATE LIMITED

Address: Sahney Towers, 81, First Floor, Poonamallee High Road, Nerkundram,

Chennai, Tamil Nadu - 600 107 Telephone: +91-98846 48464 E-mail: support@dinglisaarc.com Website: https://dinglisaarc.com











