


SPECIFICATIONS

| Size | Metric | British |
|--|-------------|-------------------|
| Max. Working Height A | 14.30m | 46ft 11in |
| Max. Platform Height B | 12.30m | 40ft 4in |
| Overall Length(Without Outriggers) | 3.19m | 10ft 6in |
| Overall Length(With Outriggers) C | 3.84m | 12ft 7in |
| Overall Width D | 1.76m | 5ft 9in |
| Overall Height(Rails Up) E | 2.74m | 9ft |
| Overall Height(Rails Down) F | 1.97m | 6ft 6in |
| Platform Size(Length×Width) | 2.88m×1.52m | 9ft 5in × 5ft |
| Platform Extension Size G | 1.43m | 4ft 8in |
| Ground Clearance | 0.24m | 9in |
| Wheelbase H | 2.29m | 7ft 6in |
| Turning Radius(Inside/Outside) | 2.15m/4.85m | 7ft 1in/15ft 11in |
| Tyres | 26×12-16.5 | 26×12-16.5 |

| Performance | | |
|---------------------------------|-------------|-------------|
| S.W.L | 363kg | 800lb |
| S.W.L On Extension | 136kg | 299lb |
| Max. Occupants (Indoor/Outdoor) | 3/2 | 3/2 |
| Gradeability | 40% | 40% |
| Travel Speed(Stowed) | 6.00km/h | 3.73mph |
| Travel Speed(Raised) | 0.45km/h | 0.28mph |
| Max. Working Slope | X-1.5°/Y-3° | X-1.5°/Y-3° |
| Up/Down Speed | 45/46sec | 45/46sec |

| Weight | | |
|----------------|--------|---------|
| Overall Weight | 5150kg | 11353lb |

| Power | | |
|----------------|---------------|---------------|
| Hydraulic Tank | 71L | 18.7gal |
| Battery | 48V/320Ah | 48V/320Ah |
| Charger | 48V/35A | 48V/35A |
| Driving Motor | 2×32VAC/3.3kW | 2×32VAC/3.3kW |
| Lifting Motor | 48VDC/3.8kW | 48VDC/3.8kW |

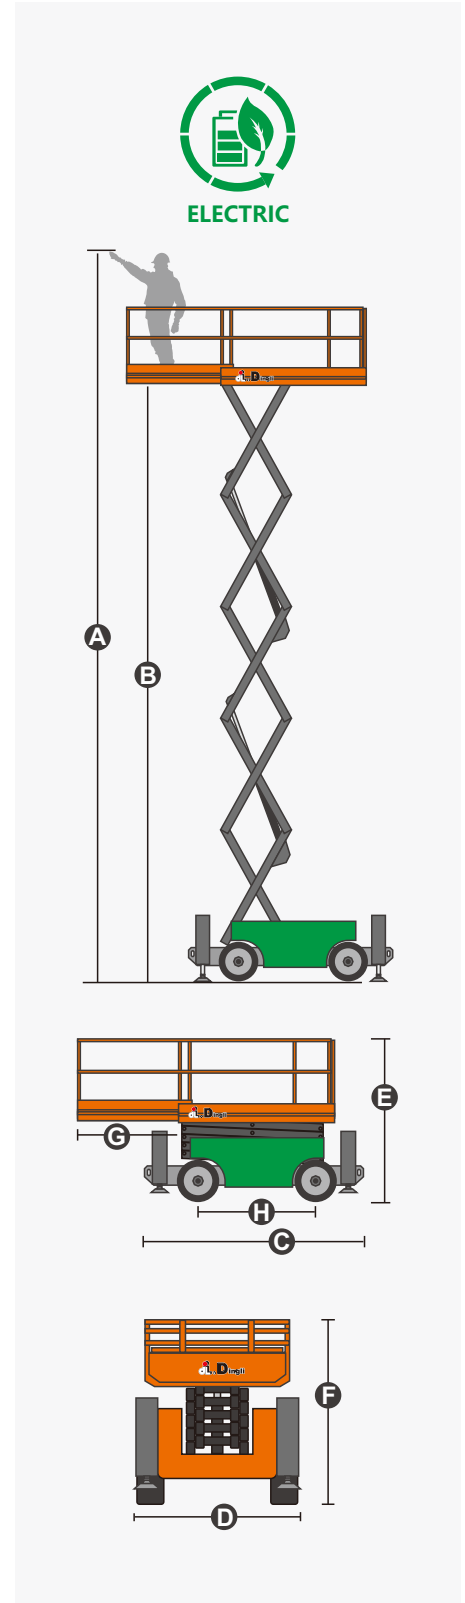

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Standard Transport Forklift Pockets
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height
- Oscillating Axle Chassis



DINGLI AWP INDIA PRIVATE LIMITED

Address: Sahney Towers, 81, First Floor, Poonamallee High Road, Nerkundram,
Chennai, Tamil Nadu - 600 107
Telephone: +91-98846 48464
E-mail: support@dinglisaarc.com
Website: <https://dinglisaarc.com>

