


SPECIFICATIONS

| Size | Metric | British |
|-------------------------------------|-------------|---------------------|
| Max. Working Height A | 22.00m | 72ft 2in |
| Max. Platform Height B | 20.00m | 65ft 7in |
| Overall Length C | 4.72m | 15ft 6in |
| Overall Width D | 1.25m | 4ft 1in |
| Overall Height(Rails Up) E | 3.82m | 12ft 6in |
| Overall Height(Rails Down) F | 2.99m | 9ft 10in |
| Platform Size(Length×Width) | 4.30m×1.19m | 14ft 1in × 3ft 11in |
| Platform Extension Size G | 1.80m | 5ft 11in |
| Ground Clearance(Stowed/Raised) | 0.20m/0.02m | 8in/1in |
| Wheelbase H | 3.18m | 10ft 5in |
| Turning Radius(Inside/Outside) | 1.60m/2.30m | 5ft 3in/7ft 7in |
| Tyres | 28×10-22 | 28×10-22 |

| Performance | | |
|---------------------------------|----------|----------|
| S.W.L | 750kg | 1653lb |
| S.W.L On Extension | 750kg | 1653lb |
| Max. Occupants (Indoor/Outdoor) | 2/2 | 2/2 |
| Gradeability | 25% | 25% |
| Travel Speed(Stowed) | 3.5km/h | 2.17mph |
| Travel Speed(Raised) | 0.5km/h | 0.31mph |
| Max. Working Slope | 1°(0°) | 1°(0°) |
| Up/Down Speed | 85/75sec | 85/75sec |

| Weight | | |
|----------------|---------|---------|
| Overall Weight | 12350kg | 27227lb |

| Power | | |
|----------------|---------------|---------------|
| Hydraulic Tank | 130L | 34gal |
| Battery | 48V/630Ah | 48V/630Ah |
| Charger | 48V/60A | 48V/60A |
| Driving Motor | 4×32VAC/3.3kW | 4×32VAC/3.3kW |
| Lifting Motor | 2×48VDC/8.0kW | 2×48VDC/8.0kW |

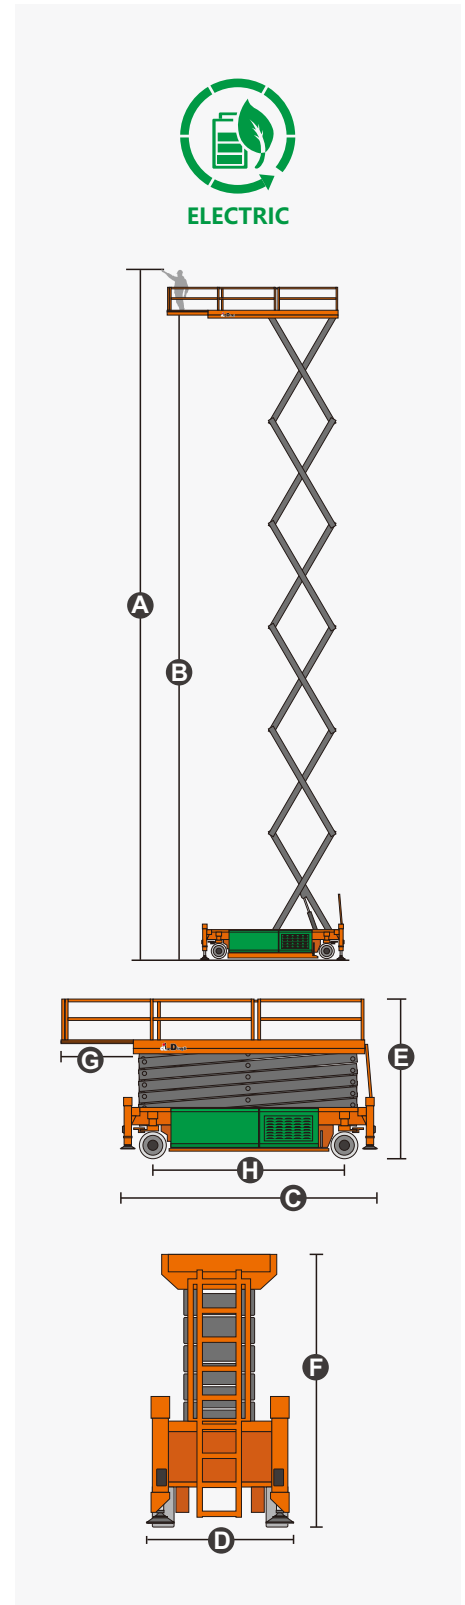

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height



DINGLI AWP INDIA PRIVATE LIMITED

Address: Sahney Towers, 81, First Floor, Poonamallee High Road, Nerkundram,
Chennai, Tamil Nadu - 600 107
Telephone: +91-98846 48464
E-mail: support@dinglisaarc.com
Website: <https://dinglisaarc.com>

