




## SPECIFICATIONS

| Size                                | Metric      | British         |
|-------------------------------------|-------------|-----------------|
| Max. Working Height <b>A</b>        | 5.90m       | 19ft 4in        |
| Max. Platform Height <b>B</b>       | 3.90m       | 12ft 10in       |
| Overall Length <b>C</b>             | 1.44m       | 4ft 9in         |
| Overall Width <b>D</b>              | 0.76m       | 2ft 6in         |
| Overall Height(Rails Up) <b>E</b>   | 1.92m       | 6ft 4in         |
| Overall Height(Rails Down) <b>F</b> | 1.52m       | 5ft             |
| Platform Size(Length×Width)         | 1.29m×0.70m | 4ft 3in×2ft 4in |
| Ground Clearance                    | 0.06m       | 2in             |
| Wheelbase <b>H</b>                  | 1.14m       | 3ft 9in         |
| Tyres                               | φ150×50mm   | φ150×50mm       |

| Performance                     |           |           |
|---------------------------------|-----------|-----------|
| S.W.L                           | 240kg     | 529lb     |
| Max. Occupants (Indoor/Outdoor) | 1/0       | 1/0       |
| Max. Working Slope              | X-1°/Y-1° | X-1°/Y-1° |
| Up/Down Speed                   | 38/25sec  | 38/25sec  |

| Weight         |       |        |
|----------------|-------|--------|
| Overall Weight | 530kg | 1168lb |

| Power          |             |             |
|----------------|-------------|-------------|
| Hydraulic Tank | 3L          | 0.8gal      |
| Battery        | 12V/85Ah    | 12V/85Ah    |
| Charger        | 12V/15A     | 12V/15A     |
| Lifting Motor  | 12VDC/0.8kW | 12VDC/0.8kW |

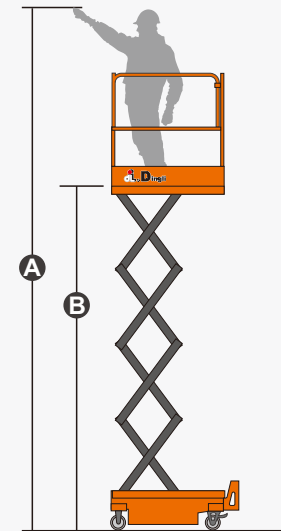

## FEATURES

### Standard Items

- Self-Locking Gates
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Charging Indicator
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



### DINGLI AWP INDIA PRIVATE LIMITED

Address: Sahney Towers, 81, First Floor, Poonamallee High Road, Nerkundram,

Chennai, Tamil Nadu - 600 107

Telephone: +91-98846 48464

E-mail: support@dinglisaarc.com

Website: <https://dinglisaarc.com>

